

 **Lightning Protection**


Lightning protector box
for power supply based on JIS

SPD Board



Lightning protector box equipped with lightning protectors based on JIS.

From the lightning surge intruded through power supply line every low voltage equipment can be protected and destruction and misoperation of the equipments can be prevented by these protectors.

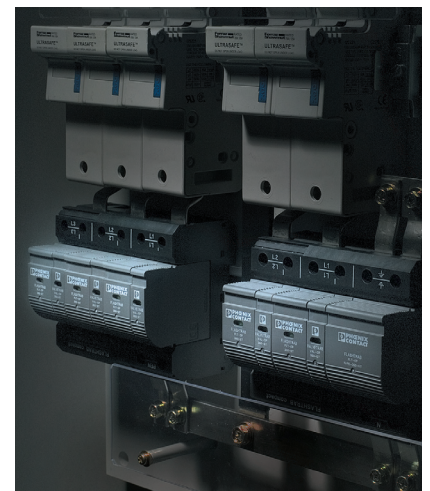


SPD Board

Specifications

Item	Number of phase and wire	Actually equipped protector	Measurements (mm)W × H × D
class I SPD board	Single phase 2 wires	FLT-CP-1S-350 1p' ce	300 × 530 × 160
	Single phase 3 wires	FLT-CP-2S-350 1p' ce	300 × 530 × 160
	3 phase 3 wires	FLT-CP-3S-350 1p' ce	300 × 530 × 160
	3 phase 3 wires + Single phase 2 wires	FLT-CP-3C-350 1p' ce FLT-CP-1S-350 1p' ce	450 × 530 × 160
	3 phase 3 wires + Single phase 3 wires	FLT-CP-3C-350 1p' ce FLT-CP-2S-350 1p' ce	450 × 530 × 160
class II SPD board	Single phase 2 wires	VAL-CP-1S-350 1p' ce	300 × 500 × 160
	Single phase 3 wires	VAL-CP-2S-350 1p' ce	300 × 500 × 160
	3 phase 3 wires	VAL-CP-3S-350 1p' ce	300 × 500 × 160
	3 phase 3 wires + Single phase 2 wires	VAL-CP-3C-350 1p' ce VAL-CP-1S-350 1p' ce	400 × 500 × 160
	3 phase 3 wires + Single phase 3 wires	VAL-CP-3C-350 1p' ce VAL-CP-2S-350 1p' ce	400 × 500 × 160

External figure

unit(mm)

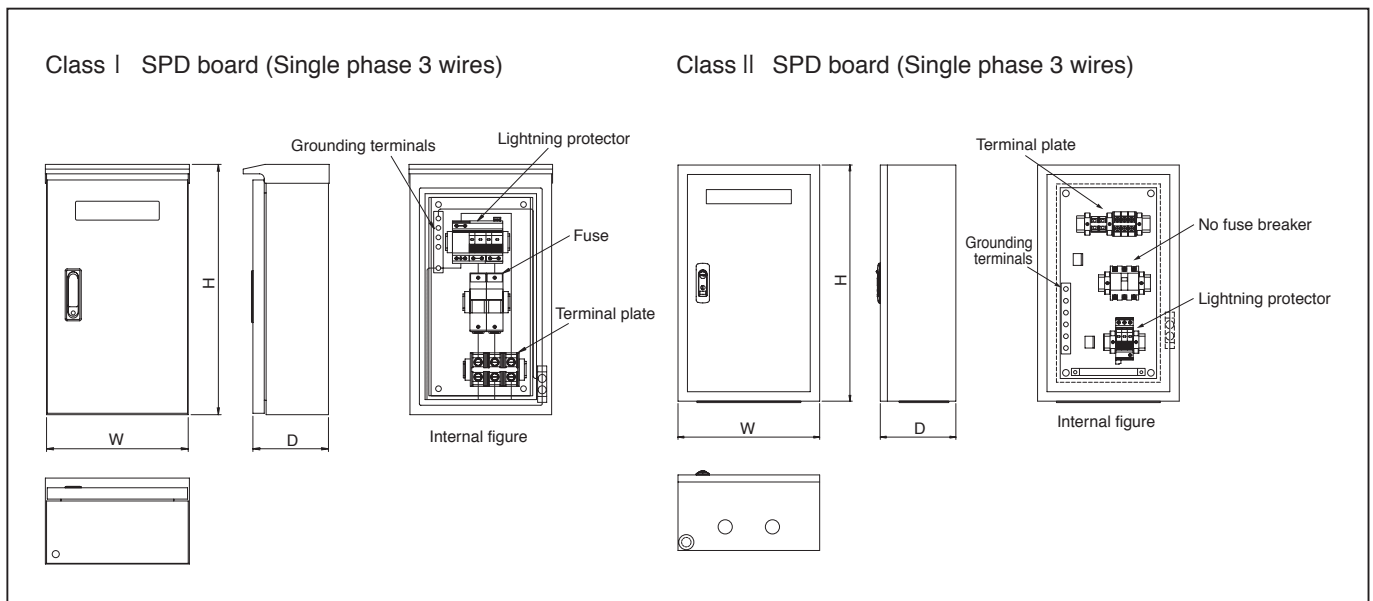

SHODEN CORPORATION

Head Office 3-8 Taihei 4-chome, Sumida-ku, Tokyo 130-8543 Japan

e-mail: f@.sdn.co.jp